Nth-Light®

PRINTING THE IMPOSSIBLE™

SL21D2-1045-8ft

Nth-Light Narrow Flexible LED Strip Light

Driver Type	**Constant Voltage**
Average Current	**200mA – 600mA/ft**
Maximum Voltage	**12V**
Average Power	**2.4 – 7.2W/ft**
Luminous Flux	**60lm/ft**
Luminous Efficacy	**25 – 30lm/W**
Nominal CCT	**5000 – 6000k**
Typical CRI	**70 – 73**
Distribution	**Lambertian**
Operating Temp	**-17C to 25C**
Bend Radius	**5mm**
Lumens/Gram	**25**

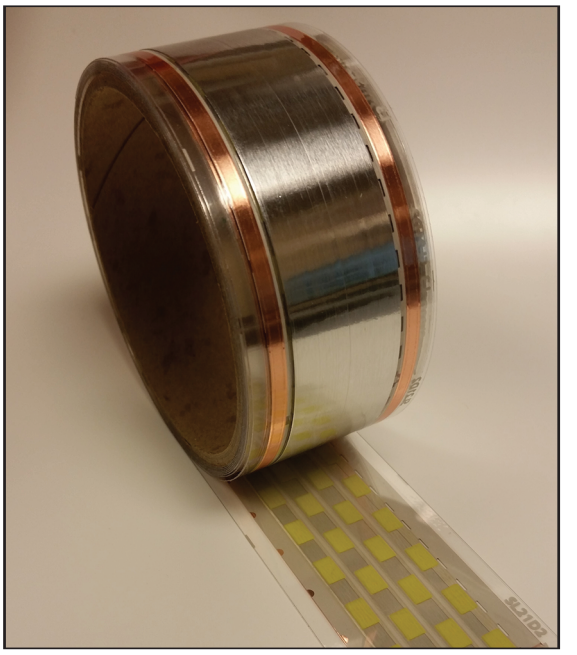

- Exceptional Light Uniformity
- Low Glare and Shadowing
- Flexible, 0.2" Bend Radius
- Low Profile, Thin as 0.008" (+/- 0.001")
- Lightweight
- Can be Trimmed to 4 Inch Length
- Impact Resistant
- Easily Installed, Ideal for Uneven Surfaces
- Diffuse Light, No Lens or Optics Required
- Copper Electrical Bus Bar

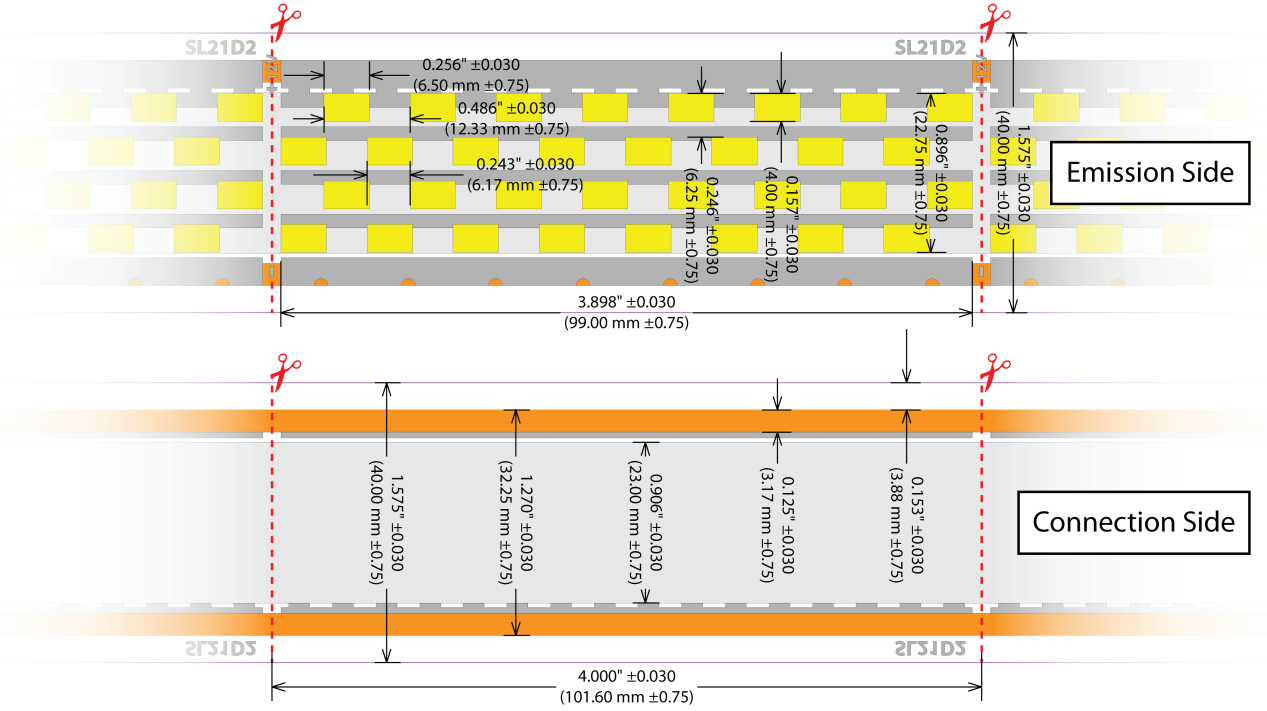

NthDegree Technologies Worldwide Inc

©2016, all rights reserved.
Specifications may change without notice.

Rev#: 2017-04-11